

# Cast Iron Outdoor Swing

Thank you for your purchase of this swing in the *Painted Sky Collection* of outdoor benches, swings and accessories. Every step has been taken to make this the best looking longest lasting bench in the market today. Our 3-step wood sealing process and powder coat iron finish give you a product to enjoy for years to come. The entire selection can be seen at [www.paintedskydesigns.com](http://www.paintedskydesigns.com)

## Parts List


Tube frame front .....	2
Tube frame back .....	2
Frame top .....	1
Side frame braces .....	2
Rear cross frame supports .....	2
Base caps .....	4
Seat support brackets .....	2
Chain .....	2
"S" hook .....	2
Mounting hardware (above right)	
Hex bolt set (#4) .....	4
Hex wrench .....	1
Side brace bolt set (#1) .....	4
Cross support bolts (#1) .....	4
Support connect bolt set (#3) .....	1
Seat bolt set (#2) .....	8

## Tools needed:


Medium phillips screwdriver  
Adjustable wrench

## Assembly Instructions



### Frame

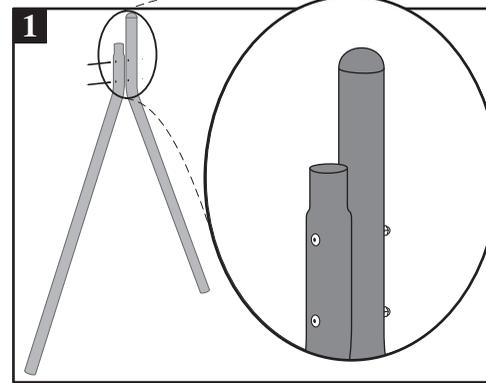


**Step 1.** Combine front (open top) and rear (capped top) swing supports for both sides of the swing with the long hex head bolt and nut (#4 above). Snug, but do not tighten.

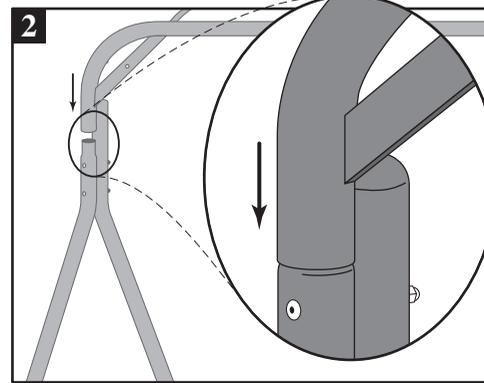

**Step 2.** Attach top frame section by aligning with side frame as shown, then pulling down until sections fit tightly. Now, **tighten the bolts from step 1.**

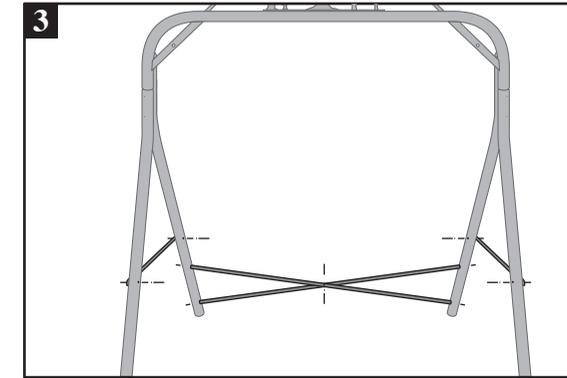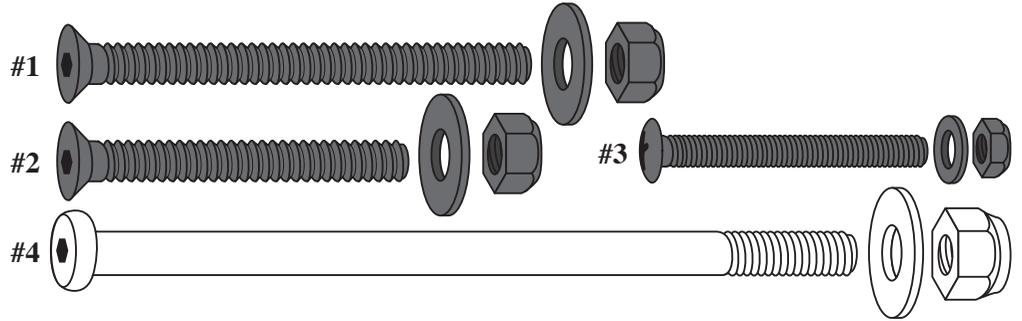


**Step 3.** Add side braces using short hex head bolts and nuts (#1 above). Add the rear cross supports by threading bolt (#1 above) through frame and into each end. Use bolt and nut (#3 above) to secure the braces together where they cross.

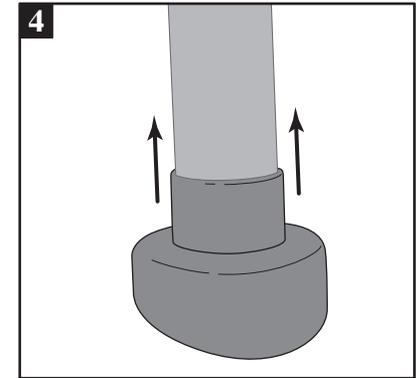


**Step 4.** Lift each corner of the frame and slide the plastic bases onto the bottom of the frame legs.


### Swing Seat

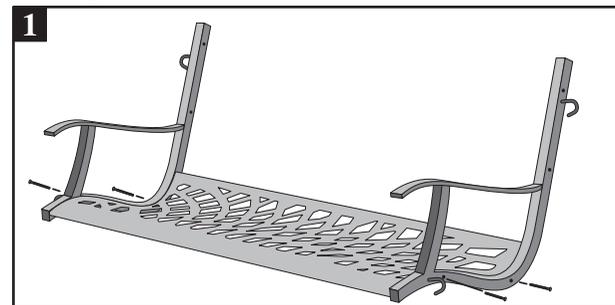

**Step 1.** Attach seat to the seat frame with the nut/bolt/washer combo (#2 above). Do not tighten.

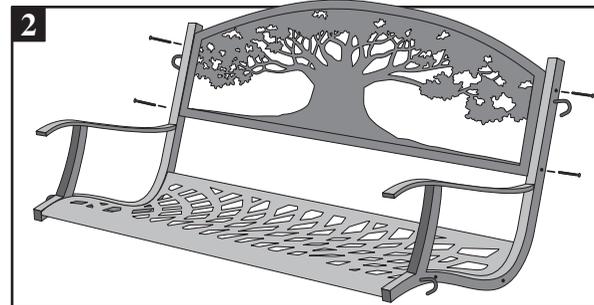

**Step 2.** Attach the back casting in the same manner as in step 1. Now, **tighten All bolts.**

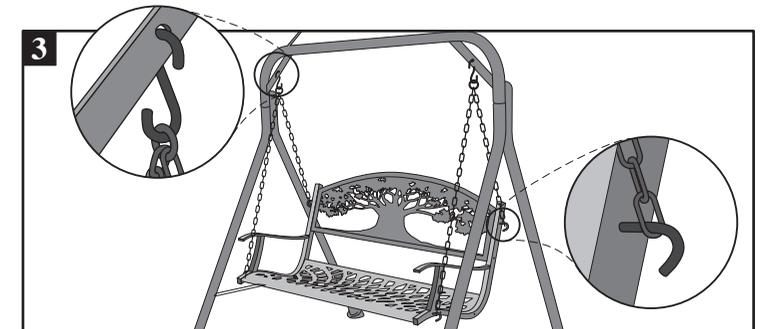

**Step 3.** Attach "S" hook to top corners of frame. Attach the "O" ring in each chain to one "S" hook. Hang swing from chains using the longest section in the front, and the short section in the back.